



称重模块



量程 Capacities

SBS - 250lb, 250kg, 500kg, 1t, 1.5t, 2t, 2.5t, 5t, 7.5ts



SBSB - 250lb, 250kg, 500kg, 1t, 1.5t, 2t, 2.5t, 5t, 7.5ts

主要特点 Features

- 合金钢结构
- 使用悬臂梁SBS/SBSB传感器
- 适用于平台秤、搅拌站、皮带秤和配料秤等

接线方式 Schematic

- 红色: + 激励
- 黑色: - 激励
- 白色: - 信号
- 绿色: + 信号

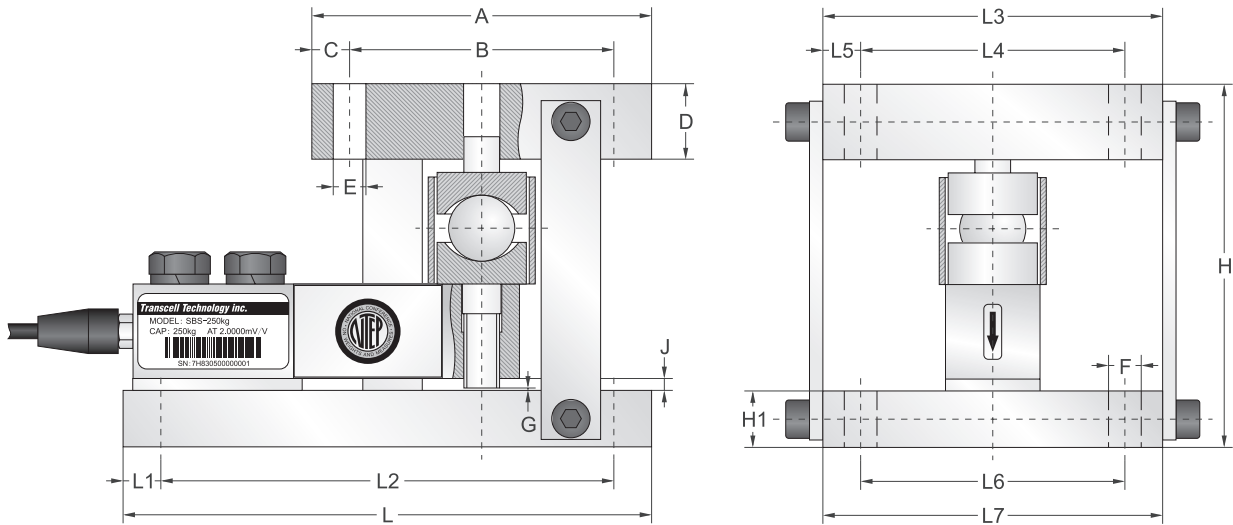

量程/Capacities		A	B	C	D	E	F	G	H	H1	J	L	L1	L2	L3	L4	L5	L6	L7
250lb/250kg~2.5ts	mm	114.3	88.9	12.7	25.4	4xØ11	4xØ11	0.2~0.3	122.2	19	4	177.8	12.7	152.4	114.3	88.9	12.7	88.9	114.3
2.5t~7.5ts	mm	150	124	13	28	4-M12	4xØ13	0.2~0.3	139.4	22.8	4	263.3	28	207.3	112	86	13	80	112

传感器技术参数		Load Cell Specifications	
额定输出	2.0~3.0mV/V ±0.1%	可用温度范围	-10°C to + 70°C
零点平衡	±1% of rated output	温度补偿范围	-10°C to + 40°C
蠕变	±0.03% of rated output	安全载荷	150%
非线性	±0.03% of rated output	输入阻抗	387 ohm ± 20 ohm
滞后	±0.03% of rated output	输出阻抗	350 ohm ± 5 ohm
重复性	±0.03% of rated output	绝缘阻抗	≥5000 M ohm (50V DC)
灵敏度温漂	≤0.002% of applied output/°C	推荐激励电压	10V DC/AC
零点温度	≤0.002% of rated output/°C	最大激励电压	15V DC/AC
导线长度	6m	导线颜色	Red(+E) Black(-E) White(-S) Green(+S)